
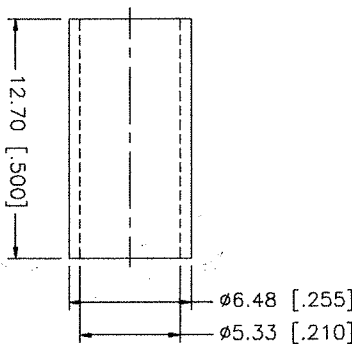
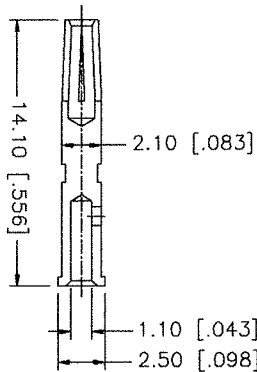
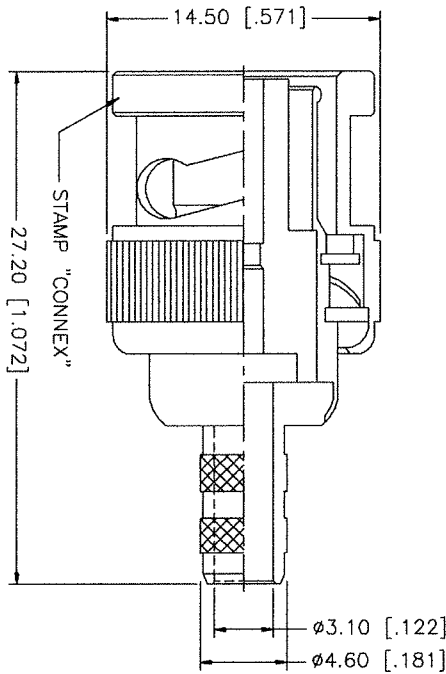


REV.	DATE	DESCRIPTION
A	11/19/03	UPDATE DRAWING FORMAT

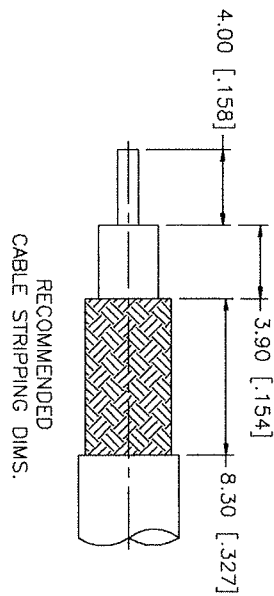

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

8				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex BNC REVERSE POLARITY CRIMP PLUG (FOR RG-58C/U CABLE)
7				UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:	DRAWN	G.R.S.	
6				0.5 - 8mm ± 0.20mm	CHECKED		
5				8 - 30mm ± 0.40mm	ISSUED		
4				30 - 120mm ± 0.50mm			
3	CONTACT PIN	PHOS. BRONZE	GOLD	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:	SHEET	1 OF 1	PART NO.
2	INSULATOR	TEFLON	NATURAL	.020 - .315 = ± 0.007"			112116RP
1	BODY	BRASS	NICKEL	.315 - 1.180 = ± 0.015"			
				1.180 - 4.724 = ± 0.020"			
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE	DWG. NO.
						C:/112/112116RP.DWG	112116RP.DWG
							REV. A
							SIZE A
							SCALE NA