
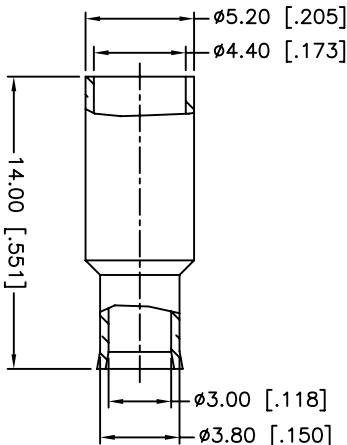

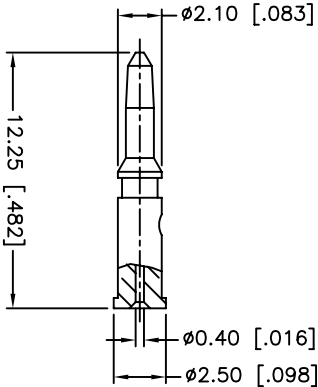


RECOMMENDED
CABLE STRIPPING DIM'S

REV.	DATE	ECR NO.	DESCRIPTION
A	08/22/98	XXXXXX	ADD SLEEVE
B	04/23/02	XXXXXX	MODIFY CONTACT PIN AND BODY LENGTH
C	01/06/03	XXXXXX	UPDATE DRAWING FORMAT
D	10/11/13	2535	FACTORY DRAWING UPDATED

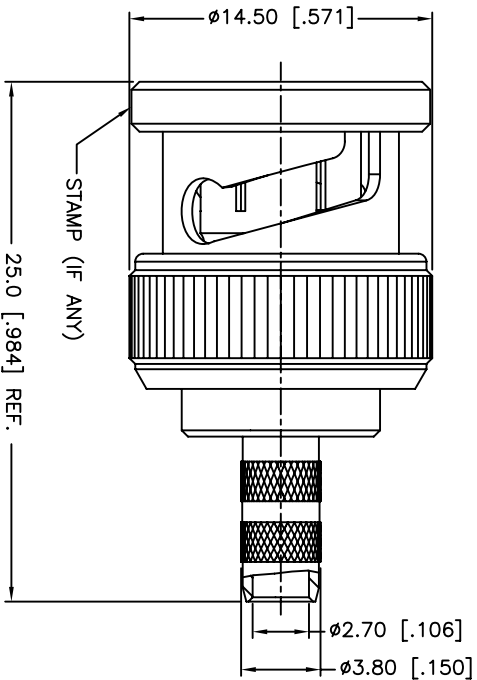

1. IMPEDANCE: 75 OHM
2. FREQUENCY RANGE: 0-2 GHz
3. VSWR: 1.3 MAX.
4. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.
5. DURABILITY: 500 CYCLES MIN.
6. TEMPERATURE RANGE: -40°C TO +85°C
7. CRIMPED FERRULE
8. HEX. CRIMP SIZE .178"
9. CRIMPED CONTACT PIN
10. HEX. CRIMP SIZE .068"

DESCRIPTION	MATERIAL	FINISH	QTY
10 FERRULE	BRASS	NICKEL	1
9 SLEEVE	DELRI	NATURAL	1
8 CONTACT PIN	BRASS	GOLD	1
7 WASHER	BRASS	NICKEL	1
6 SPRING	SKS	NICKEL	1
5 RETAINER RING	BRASS	NICKEL	1
4 GASKET	SILICONE RUBBER	RED	1
3 INSULATOR	DELRI	NATURAL	1
2 BODY	BRASS	NICKEL	1
1 SHELL	ZINC DIECAST	NICKEL	1

DO NOT SCALE DRAWING	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. TOLERANCES FOR MILLIMETERS ARE: 0.5 - 6mm ± 0.05mm 6 - 30mm ± 0.10mm 30 - 120mm ± 0.20mm ANGLES ± 1° UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: 0.020 - 0.236 ± 0.002" 0.236 - 1.180 ± 0.004" 1.180 - 4.724 ± 0.012" ANGLES ± 1°
APPROVALS	DATE
DRAWN M.ZHANG	10/11/13
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE C:/CONNEX/112135.DWG	
DWG. NO. 112135.DWG	REV. D
SIZE A	SCALE NA

Amphenol Connex

PART DESCRIPTION
BNC CRIMP PLUG-75 OHMS
(FOR RG-179/U,187/U CABLE)

PART NO. 112135

