


38212000430 - 382 Series

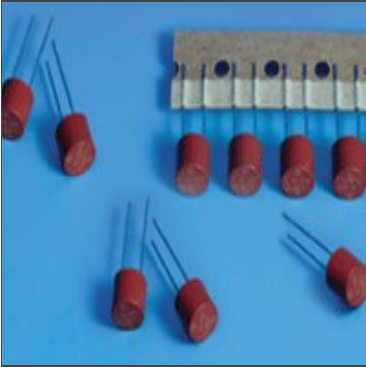

Series: 382

Questions? Contact Littelfuse Support

Fuse 382 Datasheet

The 382 Series are TR5®, time- Lag type, 250V rated fuses, with enhanced breaking capacity designed in accordance to IEC 60127 - 3.

- Features:
- Lead Free
 - 100A breaking capacity
 - Reduced PCB space requirements
 - Direct solderable or plug-in versions
 - Internationally approved
 - Low internal resistance
 - Shocksafe casing
 - Vibration resistant
 - Halogen free

Check Stock

Order Samples

Electrical Characteristics	Technical Resources	Environmental Info
Property (Mouseover for details)	Value	
Ampere Rating (A)	2	
Nominal Melting I²T (A²sec)	18	
Interrupting Rating	100A@250VAC	
Min Operating Temp °C	-40	
Max Operating Temp (°C)	85	
Moisture Sensitivity Level	MIL-STD-202 Method 106	
Nominal Power Dissipation (W)	670	
Nominal Voltage Drop (mV)	85	
Nominal Cold Resistance (Ohms)	0.028	
Opening	Slo-Blo/Time Lag (T)/Time Delay	
Package Size	TR5 (8.5x8mm)	
VAC (V)	250	

Connect with Littelfuse

Sign up to receive special offers and news

Enter your email

Submit

For more details about how we use your information, check our [Privacy Statement](#).

in G+ f t y i D i s r

Mobile Site

About Littelfuse

About Littelfuse

Conflict Free Statement

History

Investor Relations

Legal

Press Room

Privacy Statement

Supply Chain Transparency

Website Feedback

Explore Littelfuse

Capabilities Brochures

Careers

Check Distributor Stock

Competitor Cross Reference

Industries

Order Samples

Products

Services

Technical Resources

Application Designs

Education

FAQs

iDesign™

Littelfuse University

Product Catalogs

Quality Documents

Technical Documents