



2-phase Stepping Motor

86mm cir. 103H822 ☐
(3.39inch cir.) 1.8°/step

Recommendable Driver
 Refer to the page 7,17,27 and 45.

Specifications

Unipolar winding


Model		Holding torque at 2-phase energization	Rated current	Resistance	Inductance	Rotor inertia	Mass(Weight)
Single shaft	Double shaft	N·m (oz·in) MIN.	A/phase	Ω/phase	mH/phase	$\times 10^{-4}$ kg·m ² (oz·in ²)	kg (lbs)
103H8221-0441	-0411	2.15(304.5)	2	2.5	7.2	1.45(7.93)	1.5(3.31)
103H8221-0941	-0911	2.15(304.5)	4	0.62	1.8	1.45(7.93)	1.5(3.31)
103H8222-0441	-0411	4.13(584.8)	2	4.0	15	2.9(15.86)	2.5(5.51)
103H8222-0941	-0911	4.13(584.8)	4	0.97	3.6	2.9(15.86)	2.5(5.51)
103H8223-0441	-0411	6.27(887.9)	2	5.6	24	4.4(24.06)	3.5(7.72)
103H8223-0941	-0911	6.27(887.9)	4	1.35	5.6	4.4(24.06)	3.5(7.72)

Bipolar winding


Model		Holding torque at 2-phase energization	Rated current	Resistance	Inductance	Rotor inertia	Mass(Weight)
Single shaft	Double shaft	N·m (oz·in) MIN.	A/phase	Ω/phase	mH/phase	$\times 10^{-4}$ kg·m ² (oz·in ²)	kg (lbs)
103H8221-5041	-5011	2.74(388.0)	2	2.3	14	1.45(7.93)	1.5(3.31)
103H8221-5141	-5111	2.74(388.0)	4	0.6	3.5	1.45(7.93)	1.5(3.31)
103H8221-5241	-5211	2.74(388.0)	6	0.3	1.65	1.45(7.93)	1.5(3.31)
103H8222-5041	-5011	5.09(720.8)	2	2.7	23	2.9(15.86)	2.5(5.51)
103H8222-5141	-5111	5.09(720.8)	4	0.7	5.7	2.9(15.86)	2.5(5.51)
103H8222-5241	-5211	5.09(720.8)	6	0.35	2.7	2.9(15.86)	2.5(5.51)
103H8223-5041	-5011	7.44(1053.6)	2	3.6	32.5	4.4(24.06)	3.5(7.72)
103H8223-5141	-5111	7.44(1053.6)	4	0.9	8.1	4.4(24.06)	3.5(7.72)
103H8223-5241	-5211	7.44(1053.6)	6	0.45	3.4	4.4(24.06)	3.5(7.72)

Dimensions [Unit:mm(inch)]


103H8221-0441/0941 (Single shaft)
103H8221-0411/0911 (Double shaft)

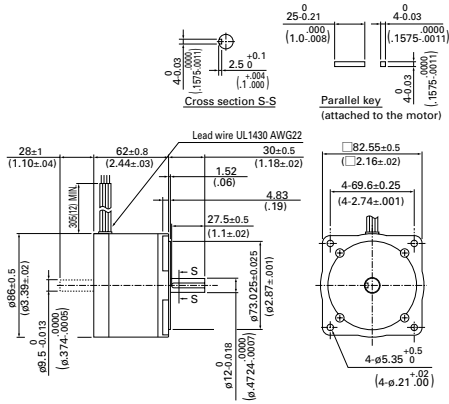

103H8222-0441/0941 (Single shaft)
103H8222-0411/0911 (Double shaft)

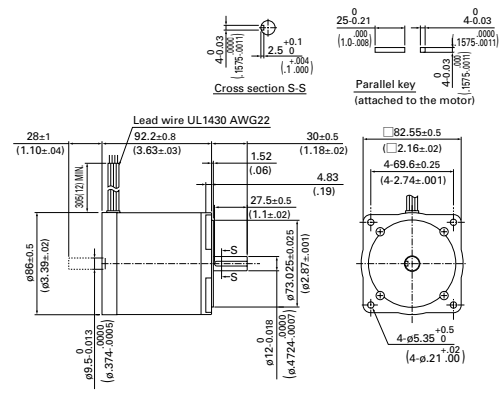


103H8223-0441/0941 (Single shaft)
103H8223-0411/0911 (Double shaft)

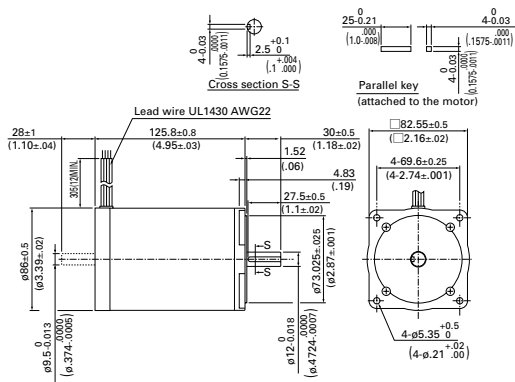

Bipolar winding

103H8221/103H8222/103H8223-5 □ 41 (Single shaft)
103H8221/103H8222/103H8223-5 □ 11 (Double shaft)

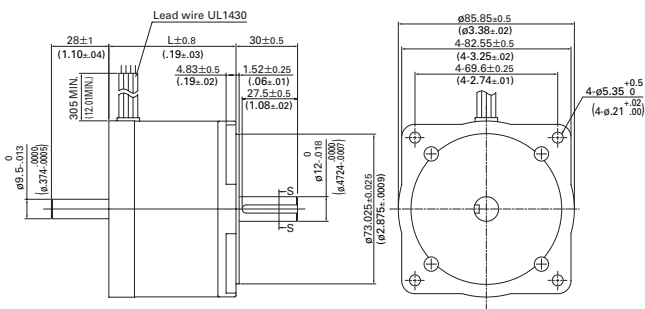


Model	AWG	L
103H8221-50 □ 1	22	62 (2.44)
103H8221-51 □ 1		
103H8221-52 □ 1	18	
103H8222-50 □ 1	22	92.2 (3.63)
103H8222-51 □ 1		
103H8222-52 □ 1	18	
103H8223-50 □ 1	22	125.8 (4.95)
103H8223-51 □ 1		
103H8223-52 □ 1	18	

39mm(1.54/0.9)
42mm(1.65/0.9)
28mm(1.10/1.8)
35mm(1.38/1.8)
42mm(1.65/1.8)
50mm(1.97/1.8)
56mm(2.20/1.8)
60mm(2.36/1.8)
86mm(3.39/1.8)
106mm(4.17/1.8)
56mm(2.20/1.8)
86mm(3.39/1.8)
106mm(4.17/1.8)
Specifications of 2-phase stepping motor
In-vacuum stepping motor
2-phase synchronous motor

Pulse Rate - Torque Characteristics


● 103H8221-0441

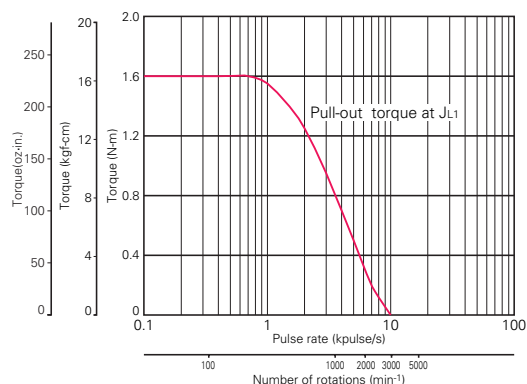

Sanyo constant current circuit

Source voltage: AC100V Operating current: 2A/phase, 2-phase energization (full-step)
J_{L1}=[7.4x10⁻⁴kg·m² (40.46 oz-in²) Use the rubber coupling]


● 103H8221-0941

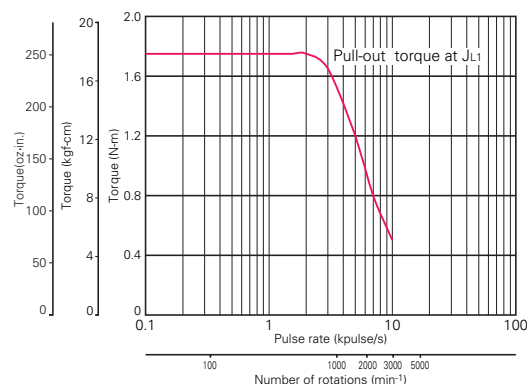

Sanyo constant current circuit

Source voltage: AC100V Operating current: 4A/phase, 2-phase energization (full-step)
J_{L1}=[7.4x10⁻⁴kg·m² (40.46 oz-in²) Use the rubber coupling]


● 103H8222-0441

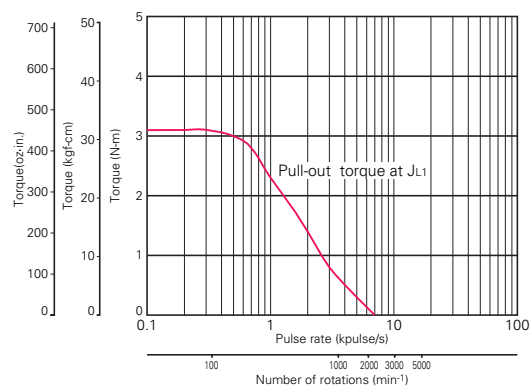

Sanyo constant current circuit

Source voltage: AC100V Operating current: 2A/phase, 2-phase energization (full-step)
J_{L1}=[15.3x10⁻⁴kg·m² (83.65 oz-in²) Use the rubber coupling]


● 103H8222-0941

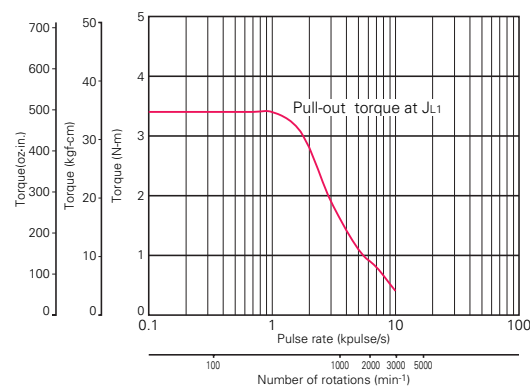

Sanyo constant current circuit

Source voltage: AC100V Operating current: 4A/phase, 2-phase energization (full-step)
J_{L1}=[15.3x10⁻⁴kg·m² (83.65 oz-in²) Use the rubber coupling]


● 103H8223-0441

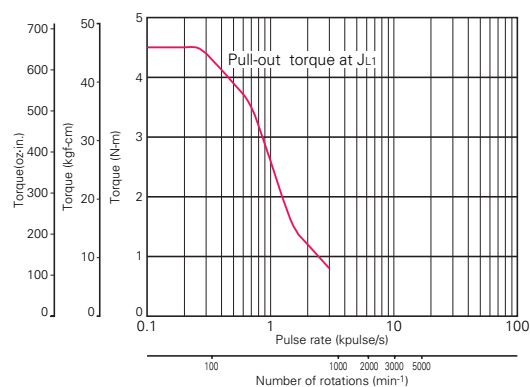

Sanyo constant current circuit

Source voltage: AC100V Operating current: 2A/phase, 2-phase energization (full-step)
J_{L1}=[15.3x10⁻⁴kg·m² (83.65 oz-in²) Use the rubber coupling]

● 103H8223-0941

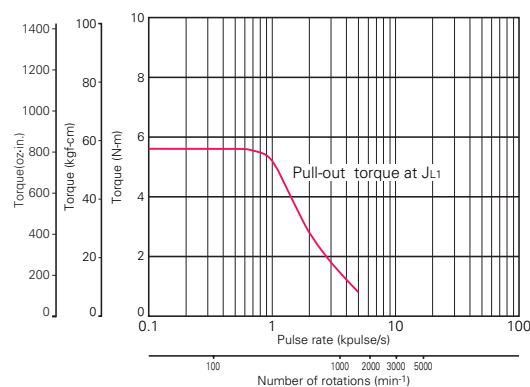


Sanyo constant current circuit

Source voltage: AC100V Operating current: 4A/phase, 2-phase energization (full-step)
J_{L1}=[15.3x10⁻⁴kg·m² (83.65 oz-in²) Use the rubber coupling]

Pulse Rate - Torque Characteristics

103H8221-5041

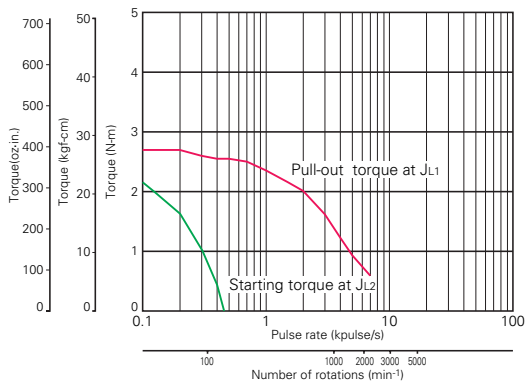


Sanyo constant current circuit

Source voltage: AC100V Operating current: 2A/phase, 2-phase energization (full-step)

$J_{L1} = [7.4 \times 10^{-4} \text{ kg-m}^2 (40.46 \text{ oz-in}^2)]$ Use the rubber coupling]

$J_{L2} = [7.4 \times 10^{-4} \text{ kg-m}^2 (40.46 \text{ oz-in}^2)]$ Use the direct coupling]

103H8221-5141

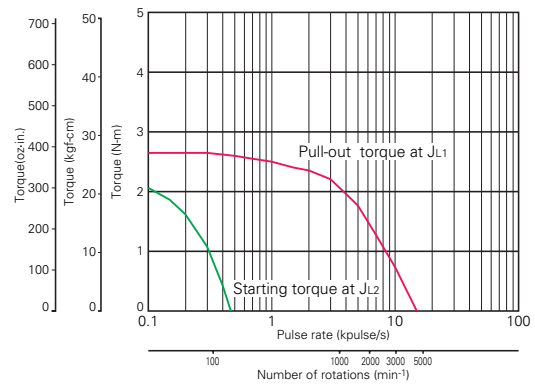


Sanyo constant current circuit

Source voltage: AC100V Operating current: 4A/phase, 2-phase energization (full-step)

$J_{L1} = [7.4 \times 10^{-4} \text{ kg-m}^2 (40.46 \text{ oz-in}^2)]$ Use the rubber coupling]

$J_{L2} = [7.4 \times 10^{-4} \text{ kg-m}^2 (40.46 \text{ oz-in}^2)]$ Use the direct coupling]

103H8221-5241

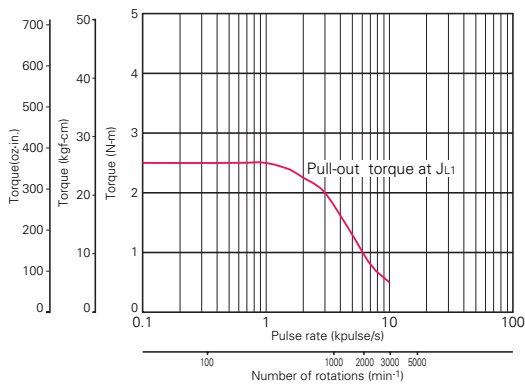


Sanyo constant current circuit

Source voltage: AC100V Operating current: 6A/phase, 2-phase energization (full-step)

$J_{L1} = [15.3 \times 10^{-4} \text{ kg-m}^2 (83.65 \text{ oz-in}^2)]$ Use the rubber coupling]

$J_{L2} = [15.3 \times 10^{-4} \text{ kg-m}^2 (83.65 \text{ oz-in}^2)]$ Use the direct coupling]

103H8222-5041

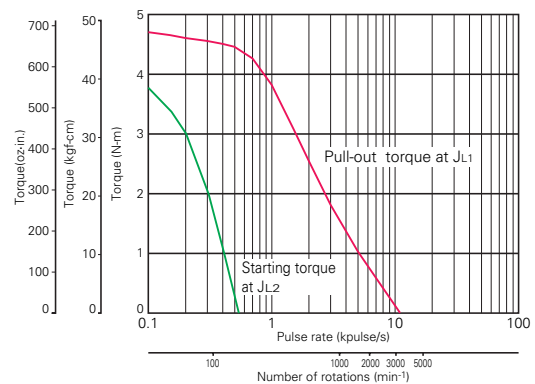


Sanyo constant current circuit

Source voltage: AC100V Operating current: 2A/phase, 2-phase energization (full-step)

$J_{L1} = [15.3 \times 10^{-4} \text{ kg-m}^2 (83.65 \text{ oz-in}^2)]$ Use the rubber coupling]

$J_{L2} = [15.3 \times 10^{-4} \text{ kg-m}^2 (83.65 \text{ oz-in}^2)]$ Use the direct coupling]

103H8222-5141

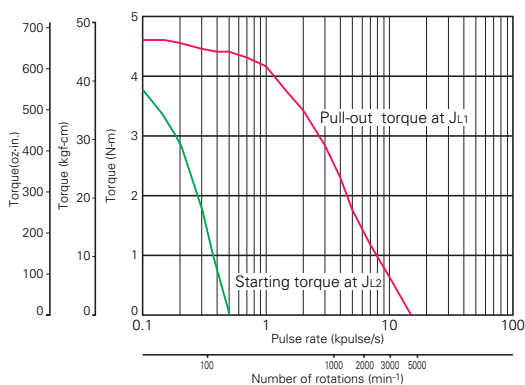


Sanyo constant current circuit

Source voltage: AC100V Operating current: 4A/phase, 2-phase energization (full-step)

$J_{L1} = [15.3 \times 10^{-4} \text{ kg-m}^2 (83.65 \text{ oz-in}^2)]$ Use the rubber coupling]

$J_{L2} = [15.3 \times 10^{-4} \text{ kg-m}^2 (83.65 \text{ oz-in}^2)]$ Use the direct coupling]

103H8222-5241

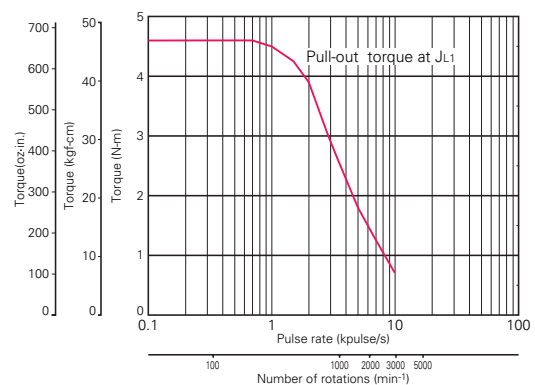

Sanyo constant current circuit


Source voltage: AC100V Operating current: 6A/phase, 2-phase energization (full-step)

$J_{L1} = [15.3 \times 10^{-4} \text{ kg-m}^2 (83.65 \text{ oz-in}^2)]$ Use the rubber coupling]

39mm(1.54)/0.9
 42mm(1.65)/0.9
 28mm(1.10)/1.8
 35mm(1.38)/1.8
 42mm(1.65)/1.8
 50mm(1.97)/1.8
 56mm(2.20)/1.8
 60mm(2.36)/1.8
 86mm(3.39)/1.8
 106mm(4.17)/1.8
 56mm(2.20)/CE
 106mm(4.17)/CE
 86mm(3.39)/CE
 Specifications of
 2-phase stepping motor
 In-vacuum
 stepping motor
 2-phase
 synchronous motor

Pulse Rate - Torque Characteristics

● 103H8223-5041

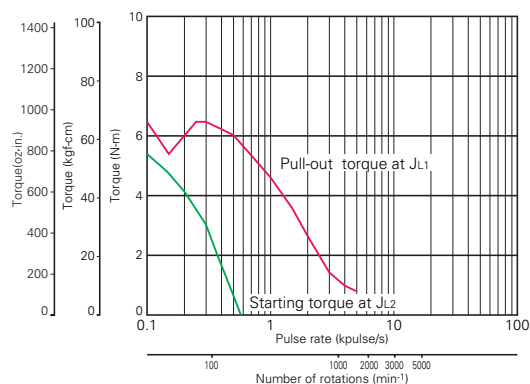


Sanyo constant current circuit

Source voltage: AC100V Operating current: 2A/phase, 2-phase energization (full-step)

J_{L1}=[15.3x10⁻⁴kg·m² (83.65 oz-in²) Use the rubber coupling]

J_{L2}=[15.3x10⁻⁴kg·m² (83.65 oz-in²) Use the direct coupling]

● 103H8223-5141

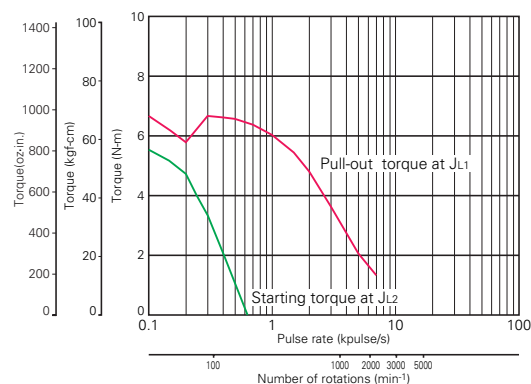


Sanyo constant current circuit

Source voltage: AC100V Operating current: 4A/phase, 2-phase energization (full-step)

J_{L1}=[15.3x10⁻⁴kg·m² (83.65 oz-in²) Use the rubber coupling]

J_{L2}=[15.3x10⁻⁴kg·m² (83.65 oz-in²) Use the direct coupling]

● 103H8223-5241

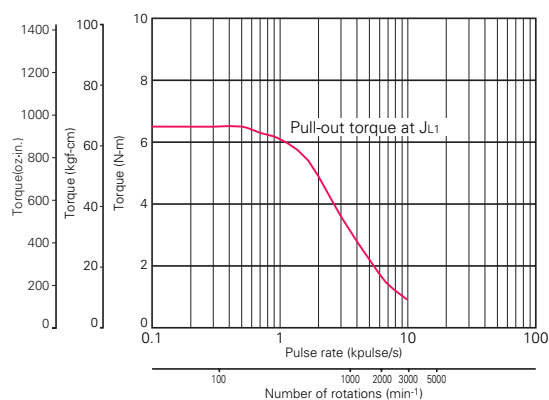

Sanyo constant current circuit

Source voltage: AC100V Operating current: 6A/phase, 2-phase energization (full-step)

J_{L1}=[15.3x10⁻⁴kg·m² (83.65 oz-in²) Use the rubber coupling]